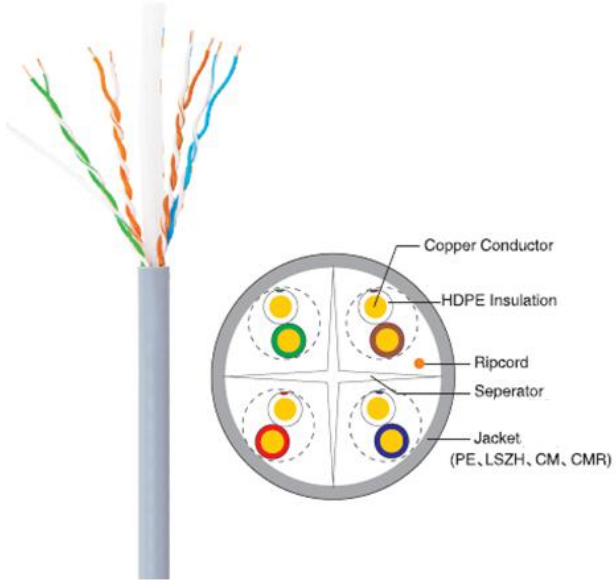


UTP Category 6 Cables

Content of Data Sheet																																																																					
Product model	CAB-LC3100A-IN																																																																				
Product specification	HSYV-6 4×2×0.57																																																																				
Test Standard	ISO/IEC 11801, TIA/EIA 568B.2																																																																				
Conductor	Material	Solid-Bare Copper																																																																			
	AWG	23																																																																			
	Nom.O.D.(mm)	0.57±0.005 mm																																																																			
	DC resistance	≤95 Ω/km																																																																			
Insulation	Material	HDPE																																																																			
	Thickness	0.2±0.02 mm																																																																			
	Diameter	1.02±0.05 mm																																																																			
	Color	Blue/White- Blue Orange /White-Orange	Green/White-Green Brown/White-Brown	<div style="display: flex; align-items: center;">  </div> <p>Electrical Characteristics:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Frequency</th> <th>Characteristic impedance</th> <th>RL</th> <th>ATT</th> <th>NEXT</th> </tr> <tr> <th>MHz</th> <th>ohm</th> <th>≥dB/100m</th> <th>≤dB/100m</th> <th>≥dB/100m</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>100±15</td> <td>20.0</td> <td>2.0</td> <td>74.3</td> </tr> <tr> <td>4</td> <td>100±15</td> <td>23.0</td> <td>3.8</td> <td>65.3</td> </tr> <tr> <td>10</td> <td>100±15</td> <td>25.0</td> <td>6.0</td> <td>59.3</td> </tr> <tr> <td>16</td> <td>100±15</td> <td>25.0</td> <td>7.6</td> <td>56.2</td> </tr> <tr> <td>20</td> <td>100±15</td> <td>25.0</td> <td>8.5</td> <td>54.8</td> </tr> <tr> <td>31.25</td> <td>100±15</td> <td>23.6</td> <td>10.7</td> <td>51.9</td> </tr> <tr> <td>62.5</td> <td>100±15</td> <td>21.5</td> <td>15.4</td> <td>47.4</td> </tr> <tr> <td>100</td> <td>100±15</td> <td>20.1</td> <td>19.8</td> <td>44.3</td> </tr> <tr> <td>155</td> <td>100±15</td> <td>18.9</td> <td>24.7</td> <td>41.7</td> </tr> <tr> <td>200</td> <td>100±15</td> <td>18.0</td> <td>29.0</td> <td>39.8</td> </tr> <tr> <td>250</td> <td>100±15</td> <td>17.3</td> <td>32.8</td> <td>38.3</td> </tr> </tbody> </table>		Frequency	Characteristic impedance	RL	ATT	NEXT	MHz	ohm	≥dB/100m	≤dB/100m	≥dB/100m	1	100±15	20.0	2.0	74.3	4	100±15	23.0	3.8	65.3	10	100±15	25.0	6.0	59.3	16	100±15	25.0	7.6	56.2	20	100±15	25.0	8.5	54.8	31.25	100±15	23.6	10.7	51.9	62.5	100±15	21.5	15.4	47.4	100	100±15	20.1	19.8	44.3	155	100±15	18.9	24.7	41.7	200	100±15	18.0	29.0	39.8	250	100±15	17.3	32.8
Frequency	Characteristic impedance	RL	ATT			NEXT																																																															
MHz	ohm	≥dB/100m	≤dB/100m			≥dB/100m																																																															
1	100±15	20.0	2.0			74.3																																																															
4	100±15	23.0	3.8			65.3																																																															
10	100±15	25.0	6.0			59.3																																																															
16	100±15	25.0	7.6			56.2																																																															
20	100±15	25.0	8.5			54.8																																																															
31.25	100±15	23.6	10.7			51.9																																																															
62.5	100±15	21.5	15.4			47.4																																																															
100	100±15	20.1	19.8	44.3																																																																	
155	100±15	18.9	24.7	41.7																																																																	
200	100±15	18.0	29.0	39.8																																																																	
250	100±15	17.3	32.8	38.3																																																																	
Pitch	Offset pitch	≤20 mm																																																																			
	Cable pitch	≤120 mm																																																																			
Sheath	Material	PVC(complies RoHS/REAC)																																																																			
	External O.D.	6.2±0.3 mm																																																																			
	Color	Blue(RAL5015)																																																																			
	Tensile strength	>13.5 Mpa																																																																			
	Thickness	0.6±0.05 mm																																																																			
Surface Printing	Letter height	3.0±0.3 mm																																																																			
	Color	Black																																																																			
	Print error & Space	1±0.005 m																																																																			
	Case number	Yes																																																																			
	Packing	Packing	Carton																																																																		

	Once packing dimension			Frequency	FEXT	PS NEXT	PS FEXT	Phase delay
	420mm*205mm*420mm			MHz	≥dB/100m	≥dB/100m	≥dB/100m	≤ns/100m
	Twice packing dimension			1	63.8	72.3	64.8	570.0
	450mm*440mm*445mm			4	51.7	63.3	57.7	552.0
	Twice packing quantity			10	43.8	57.3	44.8	545.4
	2 cases			16	39.7	54.3	40.7	543.0
Packing length	305±1m			20	37.7	52.8	38.7	542.0
				31.25	33.9	49.9	34.9	540.4
Rip-cord	Yes	Crossing backbone	Yes	62.5	27.8	45.4	28.8	538.6
Ambient temperature	-20°C ~ 60°C			100	23.8	42.3	24.8	537.4
				150	20.2	39.4	20.9	536.0
				200	17.7	37.8	18.7	536.0
				250	15.8	36.3	16.8	536.0

Zhejiang Uniview Technologies Co.,Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2011-2018 Zhejiang Uniview Technologies Co.,Ltd. All rights reserved.

*Product specifications and availability are subject to change without notice.