

XVR302-08U-IF



Key Features


- Support TVI, AHD, CVI, CVBS, IP cameras with adaptive access
- Support audio over coaxial cable
- 8-channel BNC input
- Up to 8MP resolution for recording
- Support 1-ch HDMI output at up to 4K, 1-ch VGA output at up to 1920*1080
- Long transmission distance over coaxial cable
- Support 1-ch face recognition with analog camera or third-part IPC
- Support 4-ch face recognition with UNV face capture IPC
- Up to 16 face libraries, total capacity of 100000 face images

Specifications


Model	XVR302-08U-IF
Video/Audio Input	
Analog Video Input	8-ch, BNC
IP Video Input	8-ch (only IP up to 16ch), each channel up to 4K
Supported Analog Camera Types	<p>Support AHD input:</p> <ul style="list-style-type: none"> 8MP@15fps 5MP@20fps 4MP@30fps 3MP@30fps 1080P@30fps 720P@60fps <p>Support TVI input:</p> <ul style="list-style-type: none"> 8MP@15fps 5MP@20ps 4MP@30fps 3MP@20fps 1080P@30fps 720P@60fps <p>Support CVI input:</p>

	8MP@15fps 5MP@20fps 4MP@30fps 1080P@30fps 720P@60fps Support CVBS input
Audio Input	4-ch, RCA
Two-way Audio	1-ch, RCA
Network	
Incoming Bandwidth	80 Mbps
Outgoing Bandwidth	64 Mbps
Remote Users	128
Protocols	TCP/IP, P2P, UPnP, NTP, DHCP, PPPoE
Video/Audio Output	
CVBS Output	1-ch, BNC
VGA Output	1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz
HDMI Output	4K(3840X2160)/30Hz,1920x1080p/60Hz, 1920x1080p/50Hz, 1600x1200/60Hz, 1280x1024/60Hz, 1280x720/60Hz,1024x768/60Hz
Audio Output	1-ch, RCA
Synchronous Playback	8-ch
Encoding	
Recording Frame Rate	Main stream: 8MP@8fps 5MP@12fps 4MP@15fps 3MP@18fps 2MP@25fps 720P@30fps Sub stream: D1@30fps (Max)
Recording Resolution	8MP/5MP/4MP/3MP/1080P/960P/720P/960H/4CIF/CIF
Hard Disk	
SATA	2 SATA interfaces
Capacity	up to 6TB for each HDD
External Interface	
Network Interface	1-J45 10M/100M/1000M self-adaptive Ethernet Interface
USB Interface	Rear panel: 1 x USB3.0, Front panel: 1xUSB2.0
Serial Interface	1 x RS485
Alarm In	8
Alarm Out	4
General	
Power Supply	12V DC Power Consumption: ≤ 12 W without HDD)
Working Environment	-10°C~+ 55°C (+14°F~+131°F), Humidity ≤ 90% RH (non-condensing)
Dimensions(WxD×H)	380mm ×318mm× 53.5mm (14.96" × 12.51"×2.1")
Weight (without HDD)	≤2.0 Kg (4.4lb)

Dimensions

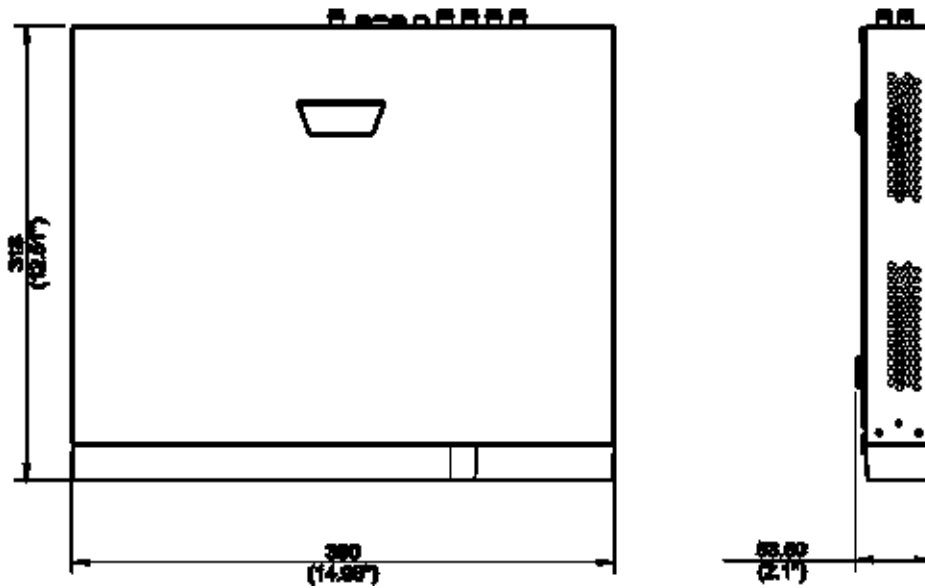

Rear Panel

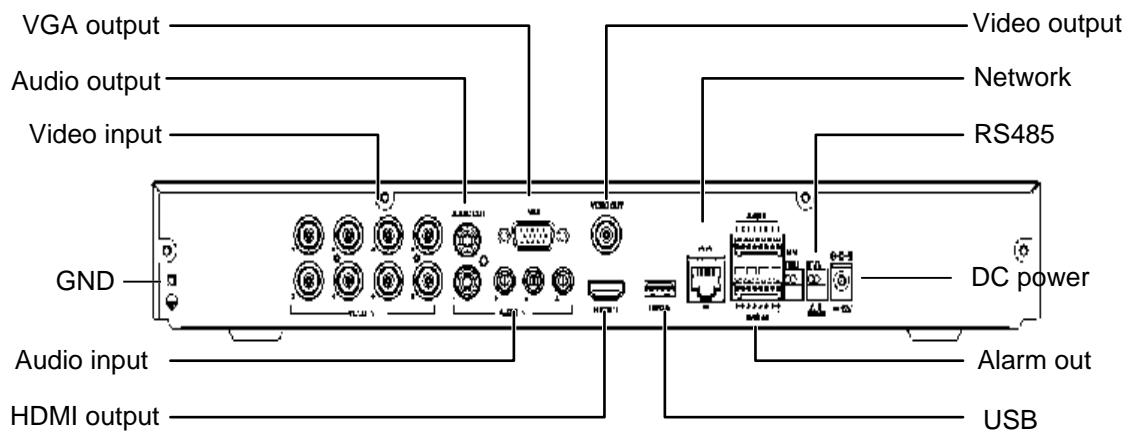

Zhejiang Uniview Technologies Co., Ltd.

Building No.10, Wanlun Science Park, Jiangling Road 88, Binjiang District, Hangzhou, Zhejiang, China

Email: overseasbusiness@uniview.com; globalsupport@uniview.com

<http://www.uniview.com>

©2020 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

* Product specifications and availability are subject to change without notice.